주철 10K 플랜지형 글로브 밸브

KS인증제품은 40A~200A까지 입니다

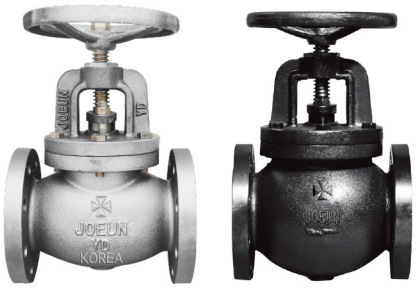

KC 수지분체도장 생산(50A~200A)

KOREA KS B 2350

KS B 2350
KCW-2014-0187



Main parts and materials / Specification		
Body/Bonnet		Grey iron
Disc		Grey iron+ Stainless steel
Stem		Stainless steel
Hand wheel		Grey iron
Applicable Fluid		Water/Steam
Working Pressure		Less than 10kgf/cm²(Max.1.0Mpa)
Applicable Temperature		Less than 220°C
Connection Method		10K FF Flange
Hydraulic Test	Body	21kgf/cm²(2.1Mpa)
	Seat	16kgf/cm²(1.6Mpa)

Outline and connecting measurement										
Size	40	50	65	80	100	125	150	200	250	300
L	190	200	220	240	290	360	410	500	600	620
D	140	155	175	185	210	250	280	330	400	445
b	20	20	22	22	24	24	26	30	30	32
H	196	263	300	309	363	437	490	602	618	691
D0	105	180	190	210	240	260	270	350	450	450

*본 제품의 규격 및 사양은 성능 개선을 위해 예고없이 변경될 수 있습니다.

주철10K플랜지형 리프트 체크 밸브

KS인증제품은 40A~200A까지 입니다

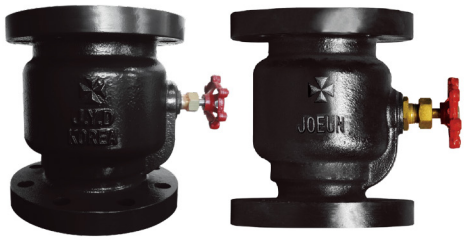

KC 수지분체도장 생산(40A~200A)

KOREA KS B 2350

KS B 2350
KCW-2014-0187

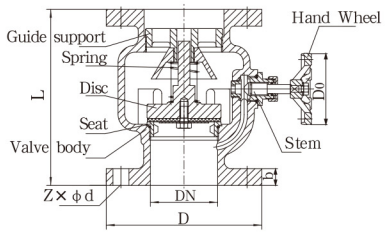

Main parts and materials / Specification		
Body		Grey iron
Disc		Grey iron
Stem		Stainless steel
Disc seat		NBR
Seat Ring		Copper
Applicable Fluid		Water
Working Pressure		Less than 10kgf/cm²(Max.1.0Mpa)
Applicable Temperature		Less than 60°C
Connection Method		10K FF Flange
Hydraulic Test	Body	21kgf/cm²(2.1Mpa)
	Seat	16kgf/cm²(1.6Mpa)

Outline and connecting measurement								
Size	40	50	65	80	100	125	150	200
L	162	183	200	210	217	255	280	416
D	140	155	175	185	210	250	280	330
b	20	20	22	24	24	24	26	26
H	120	126	135	143	155	182	196	257
D0	68	68	68	68	68	68	68	85

*본 제품의 규격 및 사양은 성능 개선을 위해 예고없이 변경될 수 있습니다.